

# (12) UK Patent Application (19) GB (11) 2 385 198 (13) A

(43) Date of A Publication 13.08.2003

(21) Application No 0202896.7

(22) Date of Filing 07.02.2002

(71) Applicant(s)

**DenseLight Semiconductors Pte Ltd**  
(Incorporated in Singapore)  
6 Changi North Street 2,  
Changi North Industrial Estate,  
Singapore 498831, Singapore

(72) Inventor(s)

**Yee Loy Lam**  
**Yuen Chuen Chan**

(74) Agent and/or Address for Service

**Gill Jennings & Every**  
Broadgate House, 7 Eldon Street,  
LONDON, EC2M 7LH, United Kingdom

(51) INT CL<sup>7</sup>

**H04B 10/10**

(52) UK CL (Edition V )

**H1K KPAC K1EB**

(56) Documents Cited

**EP 0866572 A2**

**JP 040119022 A**

**US 4005285 A**

(58) Field of Search

**UK CL (Edition T ) H1K KECA KECD KECX KPAC**


**INT CL<sup>7</sup> H01L 25/04 25/065 27/146 31/0232, H04B 10/06**  
**10/10**

**Other: Online: WPI, EPODOC, PAJ**

(54) Abstract Title

**Infrared photodetector with sensing array and hot-spot monitoring array**

(57) An angle diversity receiver for a diffused infrared wireless communications system comprises an optical filter 4 which filters out optical components of the incident radiation, a diffraction element 5 which splits the radiation into two identical images and two photodetector arrays 6,7. The elements of the first array 6 are continuously scanned to detect the location of high intensity spots in the image and then the corresponding elements in the second array 7 are switched on so as to receive the signals whilst weakly illuminated elements are switched off. Ambient noise, co-channel interference and multipath distortion can be reduced. Continuous reception is possible since only the first array 6 is subject to element scanning.

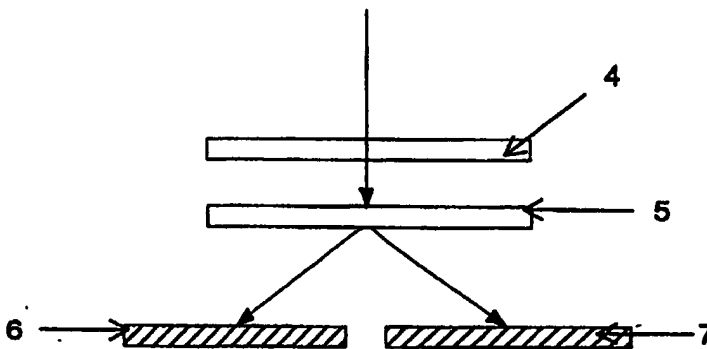

**Figure 3**

**GB 2 385 198**

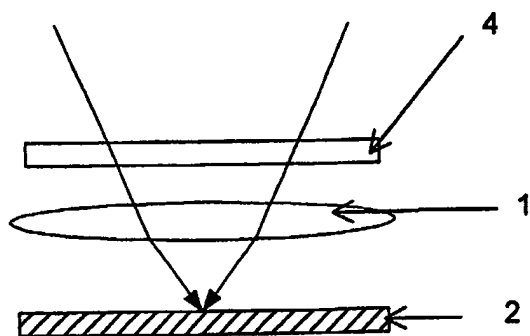


Figure 1

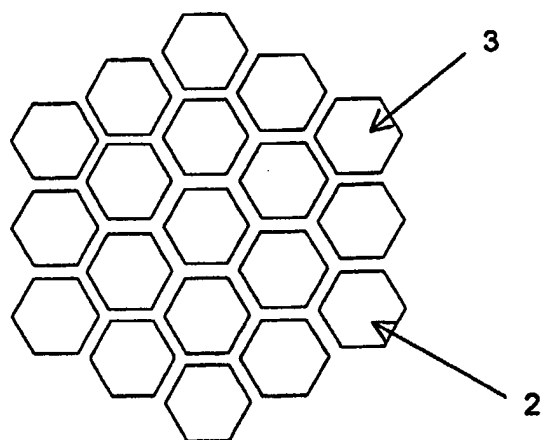


Figure 2

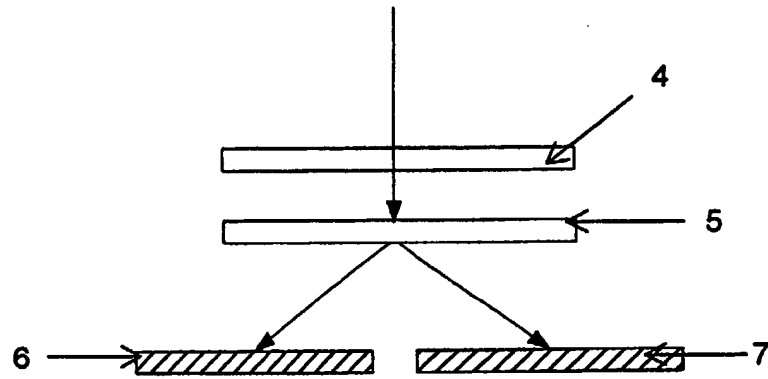


Figure 3

**RECEIVER FOR DIFFUSED INFRARED WIRELESS COMMUNICATIONS****Field of the Invention**

Wireless digital links are emerging as a requirement from portability in computing and multimedia terminals in both work and home environments. Infrared (IR) radiation is a promising medium for short range wireless communications. When compared to the ubiquitous RF links, links connected by IR have the advantages of (a) high speed communication, (b) virtually unlimited optical bandwidth, (c) highly secure transmission from signal confinement, (d) no interlink interference, and (e) no multipath fading. On the other hand, there are problems associated with IR wireless transmission such as intense ambient noise from sunlight, incandescent and fluorescent lighting, multipath dispersion, high loss and eye safety requirements.

**Background to the Invention**

Wireless IR links can be classified based on the directionality of the receiver and transmitter. A directed system is one that employs narrow field of view (FOV) transceivers that must be aimed at each other to establish a link. This type of line-of-sight (LOS) configuration has been used to link buildings at their rooftops, and high transmission rates have been achieved. However, in an indoor environment, this type of system has limited use since the light beam could be easily blocked, reducing the system's robustness. A non-directed system makes use of wide FOV transceivers that eliminate the need for direct aiming, doing away with the LOS requirement. A non-directed and non-LOS link, otherwise known as a diffused link, is more robust and mobile with a low to medium transmission rate capability. In such a link, the infrared radiation propagates through air along multiple paths of variable lengths via reflections from the walls to the receiver.

Possible configurations of the receivers used in IR wireless systems include the single element receiver, angle-diversity receiver and imaging angle-diversity receiver. The single element receiver suffers from the critical shortcoming of a low signal-to-noise ratio (SNR) capability. This is due to the fact that the signal, ambient light noise, co-channel interference and delayed multipath signals are picked up simultaneously by the photodetector element, leading to a reduction in the SNR. In addition, IR signal on this receiver could also be blocked, resulting in a total loss of signal and therefore its transmission is not guaranteed.

The angle-diversity receiver picks up the light over a wide field-of-view (FOV) and is able to achieve high gain. The effects of ambient noise, co-channel

interference and multipath distortion are reduced. Of course, by receiving light over a wide field, the blocking problem is greatly alleviated.

The imaging angle diversity receiver, shown in Figure 1, overcomes all the above problems by incorporating an optical lens to focus the transmitted signal onto an array of small photodetectors that are placed at the focal plane. Here, each element acts as a directed receiver and subtends a small part of the total FOV. The imaging angle diversity receiver's effective FOV is hence the total FOV subtended by all the elements of the array. By keeping the pixel element small, it is likely that the signal spot and localized noise sources are imaged onto different elements. By picking up the signals at the brightest spot, it is possible to completely reject the various noise sources. An optical filter is placed above the optical lens to cut off the visible component of light so as to reduce the optical noise.

The photodetector array used in the imaging angle diversity receiver could be arranged in a 2D plane, with individual elements in hexagonally shaped p-i-n structures for maximum packing, as shown in Figure 2. Since the elements are individually addressable and the scene is imaged onto the array, it is possible to locate the hot spots of high intensity signals by interrogating all the photodetector elements. Upon picking up such spots, the related photodetector elements could be monitored for the IR signals, while the other weakly illuminated photodetector elements are switched off. In this way, one is able to reduce drastically the noise associated from random scattering and electrical circuit noise. A possible scheme is to interrogate all the elements in an array, store the signals into a memory, and then scan through the signal matrix to locate the high intensity spots. Once this is achieved, the electronics will then monitor the specific elements with high intensity spots. To account for possible change in the incidence location of the strong intensity spots, the total element scanning must be carried out at a regular frequency, during which there is a lapse of signal pickup. Hence, continuous diffused IR wireless transmission is not possible.

### **Summary of the Invention**

According to the present invention, a receiver for an infrared wireless system comprises:

- a first photodetector array;
- a second photodetector array;
- means for splitting a received signal into two parts and focusing each part onto one of the photodetector arrays;
- means for monitoring the first photodetector array; and

means for adjusting the response of the second photodetector array in response to the detected signal of the first photodetector array.

The configuration of the receiver of the present invention allows for continuous, always-on diffused infrared wireless transmission. The signal is split  
5 into two parts, and one part is monitored on the first photodetector array whilst the received signal is detected at the second photodetector array. This allows the response of the second photodetector array to be adjusted based on the response of the first photodetector array to eliminate noise without a lapse of signal pickup which occurs during the scanning process in the prior art.

10 Preferably, the photodetectors are high speed photodetectors such as p-i-n photodiodes or metal-semiconductor-metal photodetectors, allowing the overall transmission to be raised above 100 megabits per second.

Preferably, the means for splitting the receiving signal comprises a diffractive optical element.

15 Preferably, the receiver also includes an optical filter. The optical filter is placed to cut out the visible components of light from the received signal so as to reduce the optical noise.

Preferably, the signal is split into two substantially identical parts.

Preferably, the means for monitoring the first photodetector array comprises  
20 means for detecting peaks in the signal incident on the first photodetector array. This results in locating the positions of the signal on the first photodetector array.

Preferably, the means for adjusting the response of the second photodetector array comprises means for activating or deactivating individual photodetectors in the second photodetector array.

25 Preferably, photodetectors are activated which correspond to the positions of the peaks detected on the first photodetector array, and the other photodetectors in the second photodetector array are deactivated. Thereby the background noise on the second photodetector array is eliminated and the signal is isolated. An alternative would be to attenuate the response of the photodetectors where a peak  
30 is not located.

Preferably, the first photodetector array is continuously scanned to locate the positions of peaks, and the response of the second photodetector array is adjusted accordingly. This allows for movement of the positions of the signal peaks on the photodetector arrays.

35

## **Brief Description of the Drawings**

Examples of the present invention will now be described with reference to the accompanying drawings in which:

Figure 1 shows a prior art imaging angle diversity receiver;

5        Figure 2 shows a photodetector array; and

Figure 3 shows a receiver in accordance with the present invention.

## **Detailed Description**

Figure 1 shows a prior art imaging angle diversity receiver having an optical  
10        lens 1 for focusing a received signal onto a photodetector array 2. A suitable  
photodetector array is illustrated in figure 2, and has nineteen hexagonal elements  
3, each comprising an individually addressable photodetector. An optical filter 4 is  
placed above the optical lens 1 to cut off the visible components of light so as to  
reduce the optical noise. By keeping the pixel element small, it is likely that the  
15        signal spot and localised noise sources are imaged onto to different elements. By  
picking up the signals at the brightest spot, it is possible to completely reject the  
various noise sources.

Figure 3 shows the proposed new imaging angle diversity receiver consisting  
of an optical filter 4, a diffractive optical element 5, a hot-spot monitoring  
20        photodetector array 6 and a sensing photodetector array 7. After passing through  
the optical filter 4, the IR radiation is imaged into two identical parts by the diffractive  
optical element 5. Two arrays of photodetectors 6, 7 are placed in the focal plane of  
the two images. Each array is similar to that shown in Figure 2, and has a number of  
individually addressable photodetectors 3. In one of the photodetector arrays 6,  
25        scanning is carried out to determine the presence and location of hot spots in the  
image. The main objective here is to sense the signal only at the hot-spots, so as to  
achieve a high SNR. Upon the determination of the location of the hot spot, the  
corresponding few elements in the sensing photodetector array 7 are then switched  
on to receive the signals. The remainder of the elements are switched off. In this  
30        way, only the elements of the high intensity illumination are activated for signal  
sensing.

It should be noted that while the sensing array 7 is receiving the signals, the  
hot-spot monitoring array 6 is continuously scanning all elements 3 of the array 6 to  
determine the hot-spots, which may shift due to the movement of the receiving  
35        equipment or people in the indoor environment. Upon a complete scan, the sensing  
array 6 could be tuned to another element so as to always capture high intensity  
signals. Hence, this new imaging diversity receiver and hence the diffused IR

wireless transmission is continuously on, since the functions of hot-spot scanning and sensing are separated and performed by two different photodetector arrays 6, 7.



## **Claims**

1. A receiver for an infrared wireless system comprising:  
a first photodetector array;  
5 a second photodetector array;  
means for splitting a received signal into two parts and focusing each part  
onto one of the photodetector arrays;  
means for monitoring the first photodetector array; and  
means for adjusting the response of the second photodetector array in  
10 response to the detected signal of the first photodetector array.
2. A receiver according to claim 1, wherein the photodetectors are high speed  
photodetectors such as p-i-n photodiodes or metal-semiconductor-metal  
photodetectors.  
15
3. A receiver according to claim 1 or 2, wherein the means for splitting the  
receiving signal comprises a diffractive optical element.
4. A receiver according to any one of claims 1 to 3, also including an optical  
20 filter.
5. A receiver according to any of the preceding claims, wherein the signal is  
split into two substantially identical parts.
- 25 6. A receiver according to any one of the preceding claims, wherein the means  
for monitoring the first photodetector array comprises means for detecting peaks in  
the signal incident on the first photodetector array.
7. A receiver according to any one of the preceding claims, wherein the means  
30 for adjusting the response of the second photodetector array comprises means for  
activating or deactivating individual photodetectors in the second photodetector  
array.
8. A receiver according to claim 7, wherein photodetectors are activated which  
35 correspond to the positions of the peaks detected on the first photodetector array,  
and the other photodetectors in the second photodetector array are deactivated.

9. A receiver according to any one of the preceding claims, wherein the first photodetector array is continuously scanned to locate the positions of peaks, and the response of the second photodetector array is adjusted accordingly.



INVESTOR IN PEOPLE

Application No: GB 0202896.7  
Claims searched: 1-9

Examiner: Stephen Jennings  
Date of search: 16 September 2002

## Patents Act 1977 Search Report under Section 17

### Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:  
UK CI (Ed.T): H1K (ECA, ECD, ECX, PAC)  
Int CI (Ed.7): H01L 25/04, 25/065, 31/0232, 27/146; H04B 10/06, 10/10  
Other: Online: EPODOC, WPI, PAJ

### Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
A	EP 0866572 A2 (AT & T Corp)	
A	US 4005285 (Xerox)	
A	JP 04-119022 (Canon)	

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.